

J - NASADKI 3/8" 12-KĄTNE CALOWE




Norme :

ASME B107.1

Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Dostępne w zestawie na stojaku metalowym (symbol J.40U).
- Wykończenie: chromowane błyszczące.

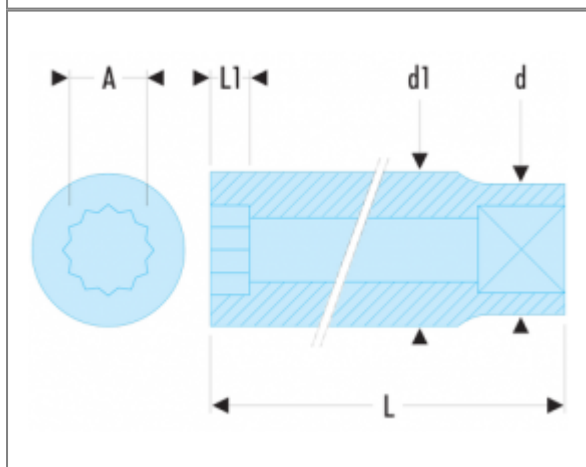

Referencje :

	A ["]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	12-kątny [mm]	[g]
J.1/4	1/4	17,5	10,0	27	6,0	12	24
J.5/16	5/16	17,5	11,9	27	6,5	12	25
J.3/8	3/8	17,6	14,1	27	7,5	12	26
J.7/16	7/16	17,5	16,0	27	9,0	12	27
J.1/2	1/2	17,5	18,1	30	10,4	12	36
J.9/16	9/16	17,7	19,5	30	10,5	12	34
J.5/8	5/8	20,0	22,0	30	12,0	12	46
J.11/16	11/16	21,0	24,0	33	13,0	12	74
J.3/4	3/4	22,7	26,0	33	14,0	12	76
J.13/16	13/16	23,0	28,0	33	16,0	12	79
J.7/8	7/8	24,7	29,7	33	16,5	12	104
J.15/16	15/16	26,3	31,3	33	16,5	12	136
J.1'	1	28,3	33,3	33	16,5	12	156