

R.E - NASADKI 1/4" 12-KĄTNE CALOWE




Norme :

ASME B107.1

Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Wykończenie: chromowane błyszczące.

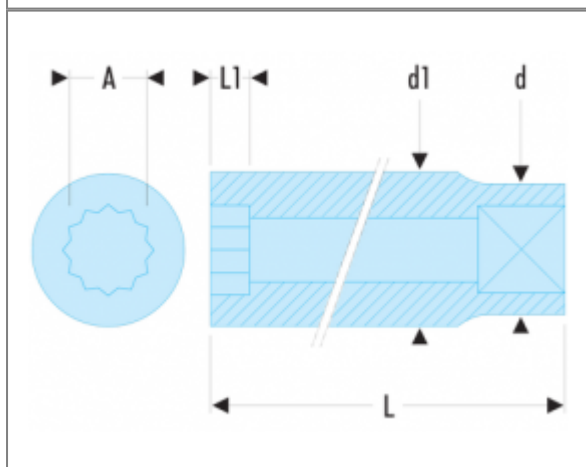

Referencje :

	A ["]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	12-kątny [mm]	[g]
R.3/16E	3/16	11,2	8,0	22	4,75	12	8,20
R.7/32E	7/32	11,2	9,0	22	5,50	12	8,30
R.1/4E	1/4	11,2	10,1	22	6,00	12	9,30
R.9/32E	9/32	11,2	10,6	22	6,00	12	8,90
R.5/16E	5/16	12,0	12,0	22	6,50	12	11,50
R.11/32E	11/32	13,0	13,0	22	6,50	12	14,50
R.3/8E	3/8	14,7	14,7	22	7,80	12	17,80
R.13/32E	13/32	14,7	14,7	22	7,80	12	17,00
R.7/16E	7/16	15,8	15,8	22	9,00	12	19,5
R.1/2E	1/2	17,7	17,7	22	10,00	12	24,5
R.9/16E	9/16	18,7	18,7	22	10,00	12	25,20