

## J.H - NASADKI 3/8" 6-KĄTNE METRYCZNE




### Norme :

**NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5**


### Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Dostępne w zestawie na stojaku metalowym (symbol J.40U).
- Wykończenie: chromowane błyszczące.

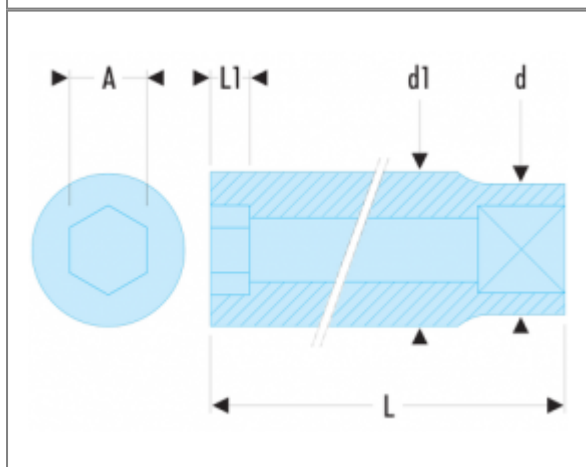

### Referencje :

	A [mm]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	6-kątny [mm]	[g]
<b>J.7H</b>	7	17,6	11,0	27	6,0	6	24
<b>J.8H</b>	8	17,6	12,2	27	6,5	6	25
<b>J.9H</b>	9	17,6	13,5	27	6,7	6	25
<b>J.10H</b>	10	17,6	14,7	27	7,8	6	26
<b>J.11H</b>	11	17,6	16,0	27	9,0	6	27
<b>J.12H</b>	12	17,6	17,2	27	9,5	6	26
<b>J.13H</b>	13	17,4	18,3	30	10,4	6	36
<b>J.14H</b>	14	17,6	19,5	30	10,5	6	34
<b>J.15H</b>	15	18,9	20,8	30	12,0	6	38
<b>J.16H</b>	16	19,9	22,0	30	12,0	6	45
<b>J.17H</b>	17	21,7	23,4	30	13,0	6	52
<b>J.18H</b>	18	21,7	24,7	33	13,0	6	69
<b>J.19H</b>	19	22,7	26,0	33	14,0	6	62
<b>J.20H</b>	20	22,2	27,2	33	15,0	6	70
<b>J.21H</b>	21	23,5	28,5	33	16,0	6	75
<b>J.22H</b>	22	24,7	29,7	33	16,5	6	80

	A [mm]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	6-kątny [ mm]	[g]
<b>J.23H</b>	23	26,0	31,0	33	16,5	6	90
<b>J.24H</b>	24	26,3	31,3	33	16,5	6	86