

## S - NASADKI 1/2" 12-KĄTNE METRYCZNE




### Norme :

**NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5**


### Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Wykończenie: chromowane błyszczące.
- Dostępne na stojaku metalowym: Symbol S.40E (8 -- > 16 mm) i symbol S.41E (17 --> 24 mm).

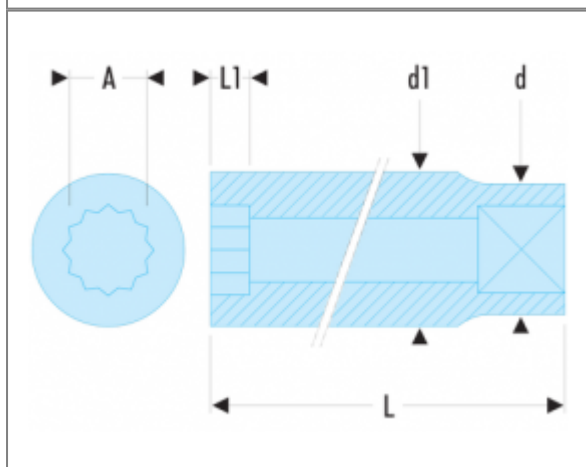

### Referencje :

	A [mm]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	12-kątny [mm]	[g]
<b>S.8</b>	8	22,8	13,1	36	6,5	12	48
<b>S.9</b>	9	22,8	13,8	36	6,5	12	48
<b>S.10</b>	10	22,8	15,3	36	7,8	12	48
<b>S.11</b>	11	22,8	16,5	36	9,0	12	51
<b>S.12</b>	12	22,8	17,8	36	9,5	12	52
<b>S.13</b>	13	22,8	18,9	36	10,4	12	55
<b>S.14</b>	14	22,8	20,2	36	10,5	12	57
<b>S.15</b>	15	22,8	21,4	36	12,0	12	60
<b>S.16</b>	16	21,6	22,6	36	12,0	12	57
<b>S.17</b>	17	23,1	24,1	36	13,0	12	61
<b>S.18</b>	18	23,4	25,4	36	13,0	12	68
<b>S.19</b>	19	24,6	26,6	36	14,0	12	69
<b>S.20</b>	20	25,4	27,4	36	14,0	12	71
<b>S.21</b>	21	25,1	29,1	38	16,0	12	93
<b>S.22</b>	22	26,4	30,4	38	16,5	12	101
<b>S.23</b>	23	27,6	31,6	38	16,5	12	122

	A [mm]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	12-kątny [mm]	[g]
<b>S.24</b>	24	28,7	32,7	38	16,5	12	130
<b>S.25</b>	25	27,7	34,1	38	16,5	12	128
<b>S.26</b>	26	29,0	35,4	38	16,5	12	138
<b>S.27</b>	27	29,2	36,6	44	19,0	12	142
<b>S.28</b>	28	30,5	37,9	44	20,0	12	163
<b>S.29</b>	29	31,3	38,7	44	20,0	12	167
<b>S.30</b>	30	33,0	40,4	44	20,0	12	185
<b>S.31</b>	31	34,2	41,6	44	20,0	12	189
<b>S.32</b>	32	35,1	42,5	44	20,0	12	198
<b>S.34</b>	34	37,5	44,9	44	20,0	12	223